

(19)



JAPANESE PATENT OFFICE

## PATENT ABSTRACTS OF JAPAN

(11) Publication number: **62142341 A**

(43) Date of publication of application: **25.06.87**


(51) Int. Cl.	<b>H01L 25/04</b>	
(21) Application number:	<b>60283618</b>	(71) Applicant: <b>MATSUSHITA ELECTRONICS CORP</b>
(22) Date of filing:	<b>17.12.85</b>	(72) Inventor: <b>NAKAGAWA SHOICHI</b>

**(54) SEMICONDUCTOR DEVICE AND MANUFACTURE THEREOF**

**(57) Abstract:**

**PURPOSE:** To improve packaging density of a substrate, by a two-stage structure even for a package having a normal size.

**CONSTITUTION:** In a recess part in the surface of a main body of a first semiconductor package 1, die mounting and wiring are performed for a first semiconductor chip 3 by a normal method. A first semiconductor package lead 2 is protruded downward vertically from the surface of the main body of the first semiconductor package. In the recess in the surface of a main body of a second semiconductor package 4, die mounting and wiring are conducted for a second semiconductor chip 5 by a normal method. A second semiconductor package lead 6 is provided on the side surface of the main body of the second semiconductor package 4 on the side of the recess part. Then the surface of the main body of the first semiconductor package 1 other than the recess part on the side of the recess part is bonded to the surface of the main body of the second semiconductor package 4 with a soldering material or a bonding agent 7 in an airtight manner. Thus, the semiconductor device for high packaging density in two-stage structure is completed.

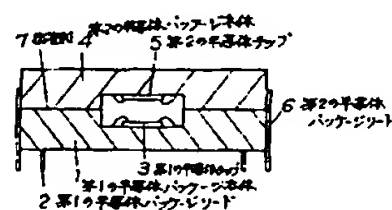

COPYRIGHT: (C)1987,JPO&Japio